# TECHNICAL NOTE

## Using the Update Tool to upgrade Lamination module with minimal firmware version for use as a Standalone Device

CONCERNED PRODUCT(S):

- Primacy printer Lamination module.

## Table des matières


TECHNICAL NOTE ..... 1

Using the Update Tool for Firmware Upgrades on the Laminator Module as a Standalone Device ..... 1

Explanation ..... 2

Firmaware Update Process ..... 2



Evolis - 14 Avenue de la Fontaine - ZI Angers-Beaucouzé 49070 Beaucouzé - France
T +33 (0) 241 367 606 - F +33 (0) 241 367 612 - SIRET 428 564 710 00054 - **info@evolis.com**

**www.evolis.com**

# Explanation

The lamination module of the Primacy lamination printer can work as a separate and stand-alone device.


To use this lamination module as a stand-alone device, following the EVOLIS Quickstart guide and apply following process to update the firmware.

Download the firmware update tool: **UpdateFirmwareLaminationModule_12102017.exe**
https://sharing.oodrive.com/share-access/sharings/BkkmDb6k.qqqyq0z_
(Password: Evolis@49)

**Caution: It's mandatory to use Evolis Premium Suite version 6.29.0.1183 or higher available from Evolis web site**


## Firmware Update Process

In case the lamination module does not have the correct firmware level (**less than 1738**), once module connected to the PC with the USB cable, the Evolis Print Center recognizes it as "Evolis Lamination Module" with "Printer off-line" status.

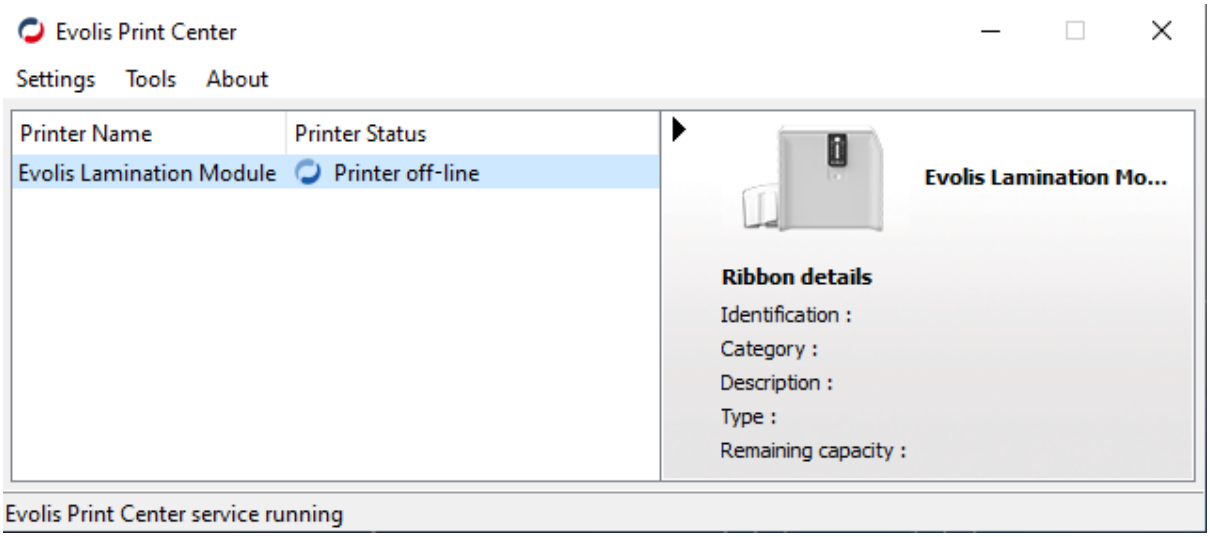

### 1st Step: Disable the supervision mode:


Right click on the “Evolis Lamination Module” and select in submenu “Disable supervision by Evolis Print Center”:

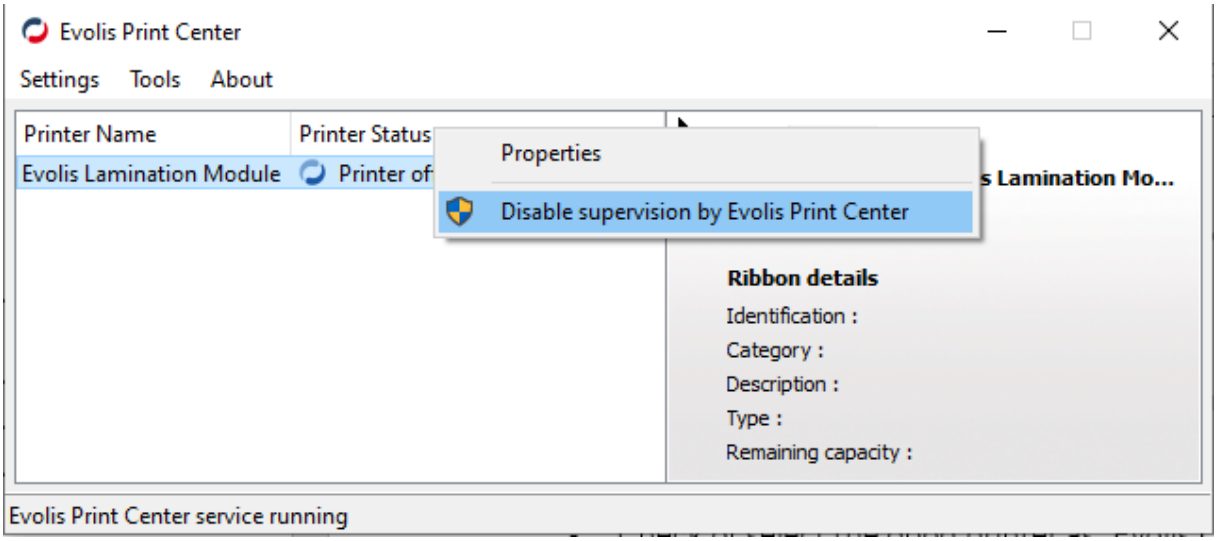



### 2nd step: run update tool:

After downloading the “**UpdateFirmwareLaminationModule_12102017.exe**” file, run it.

Click on “Install” button.

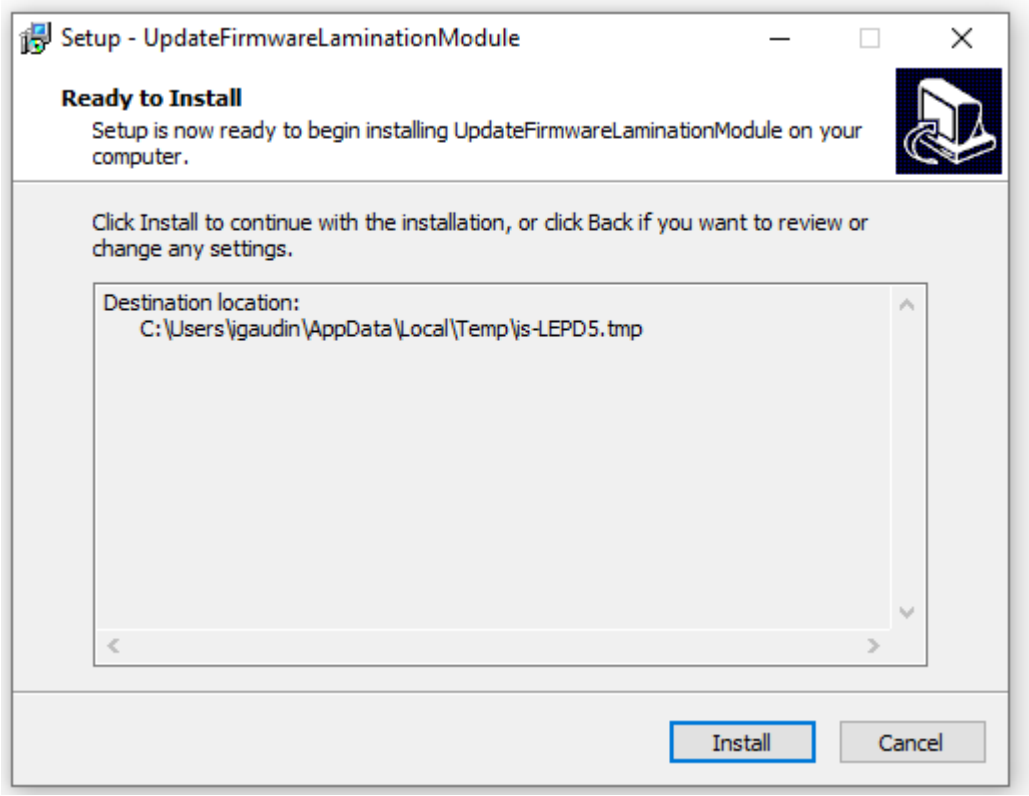


Main page is displayed.

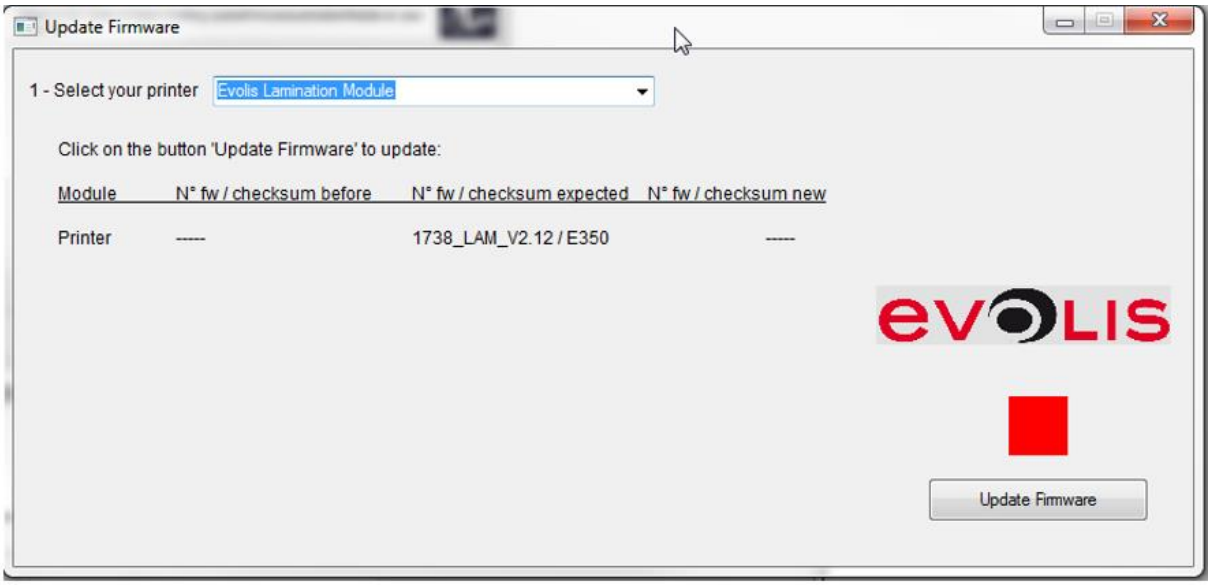


Check or select the correct printer as “Evolis Lamination Module” and click on “Update firmware” button to execute the flash process.

When the process is finished without issue, the red square becomes green.

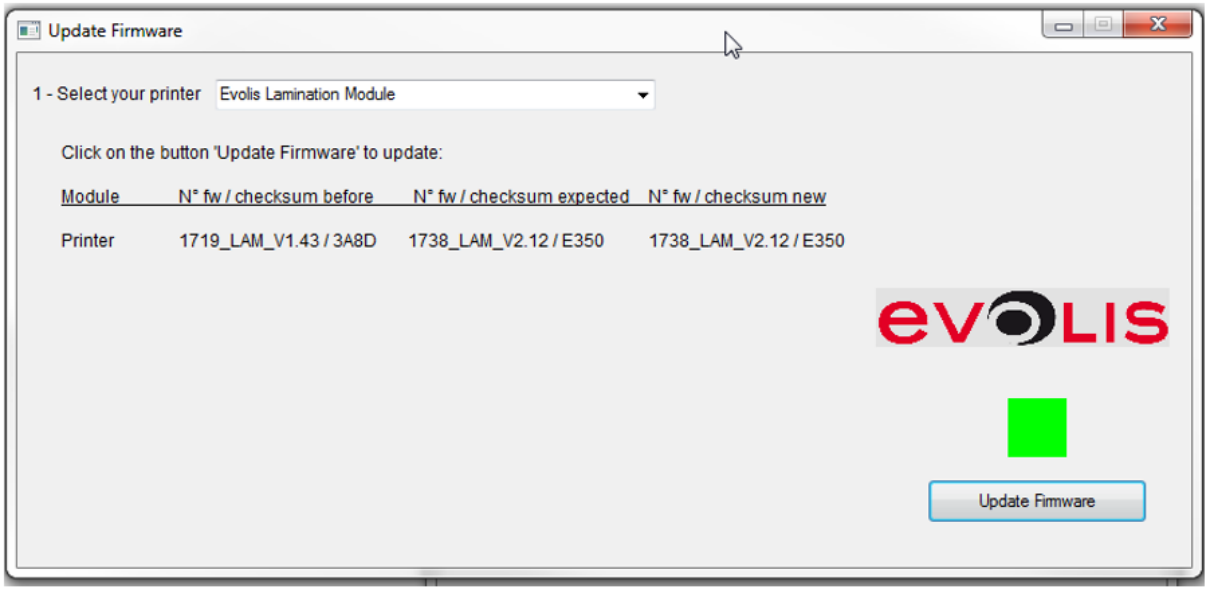


Close the tool.

### 3rd step: Enable supervision mode:

Open Print center and right click on “Evolis lamination Module” to select in sub menu “Enable supervision by Evolis Print Center”.

Now the Lamination module is fully operational as standalone device and manageable directly by Evolis Print Center.

Evolis support team “Evolis Services” remains at your disposal for any additional information.

Evolis - 14 Avenue de la Fontaine - ZI Angers-Beaucouzé 49070 Beaucouzé - France
T +33 (0) 241 367 606 - F +33 (0) 241 367 612 - SIRET 428 564 710 00054 - **info@evolis.com**

**www.evolis.com**